

TECHNICAL SPECIFICATION OF LOFT LADDER „THE TARA”

The Tara loft ladder has got double sealing and hatch thickness 86mm, thanks to it is perfect for all conditions. The Tara loft ladder has the best heat transfer coefficient on the market $U=0,36$ and the highest 4 class airtightness. Because of the excellent parameters our The Tara loft ladder is suitable for montage especially where are the large temperature differences. Moreover this model is equipped with non-slip feet, which perfectly adhere to the ground and prevent scratches on the floor surface. Our non-slip feet included in The Tara loft ladder provide an aesthetic finish for the ladder after cutting. To increase security and for comfortable use our The Tara loft ladder is also equipped with stable and durable handrail. In the interest of user convenience, the handrail has been designed in such a way that it can be mounted on the left or right side depending on customer preferences. The maximum load during use is up to 160 kg.



0,36

U_d VALUE
(W/m² * K)



PEFC
PEFC/32-32-464

By sourcing PEFC,
we are supporting
sustainably managed
forests globally

www.pefc.org



**COMPLIANCE WITH
THE STANDARD**





PROTECTIVE
FEET



HATCH
THICKNESS



SEALS



HANDRAIL



ADDITIONAL
STEP



YEARS
GUARANTEE



MAXIMUM
LOAD



AIR
TIGHTNESS

The excellent quality of materials used in the production of the stairs and attention to every detail of the finish mean that the stairs will satisfy even the most demanding customer. By choosing the best insulated loft ladder on the market, you will reduce costs associated with heating, and thus make a real contribution to the fight for a better climate. Choosing The Tara loft ladder is an investment, allowing you to reduce the loss of heated air, improve the level of thermal insulation and significantly reduce heating costs.

Accessories



MASKING
BATTEN




MOUNTING
SYSTEM



HATCH
BALUSTRADE

Technical draw

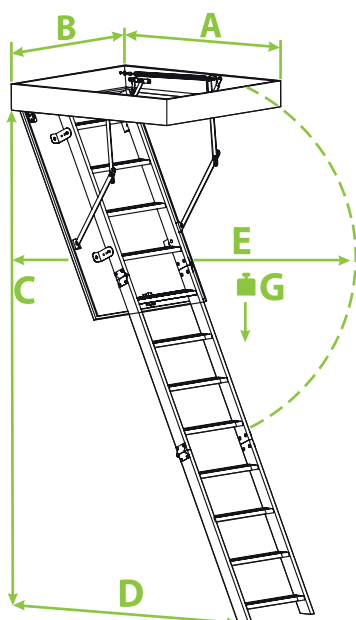

A > 113

C	280 cm
D	147 cm
E	169 cm
G	160 kg

A < 113

C	280 cm
D	139 cm
E	165 cm
G	160 kg

Technical specification

Wooden ladder	3 sections
Height of wooden box	170 mm
Width of ladder	400 mm
Width of step	358 mm
Depth of step	80 mm
Maximum landing space	147 cm
Opening distance	169 cm
Maximum ceiling height	280 cm

Box dimensions

Outer box dimensions, mounting opening 2 cm larger.

113 x 55	120 x 55	130 x 55	140 x 55
113 x 60	120 x 60	130 x 60	140 x 60
113 x 70	120 x 70	130 x 70	140 x 70

Non-standard dimensions

*Unusual dimensions available in full size of untypical stairs can not exceed 1 m².

Min - Max Length	(113) 120 - 140 cm
Min - Max Width	54 - 80 cm

LOFT LADDER „THE TARA”

